


APPLICATION NOTE:

Optimizing Performance using the
2500 Series™ Processor

December 2008



2500 Series™ Processor Scan

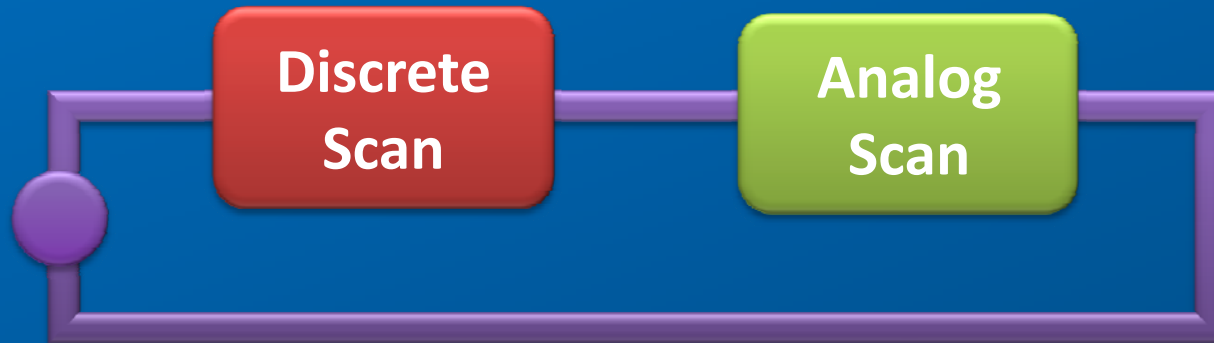

Normal I/O

Write outputs, read inputs on local, remote, and Profibus I/O.

Main RLL

Run RLL Task 1 to completion.

Special Function I/O

Service all local and remote SF modules to max task codes / scan. Service RBC serial ports.

NOTE: all discrete scan tasks run to completion, even if it causes a scan overrun. You cannot set time slices for these tasks.



Normal I/O

Local I/O Operation

- Read/write all I/O modules in the local base
- Very fast backplane access
- Typical scan time 1ms



Normal I/O

Remote I/O Operation

- 1Mbit communications, up to 15 bases
- Overhead:
 - First remote base adds ~5ms per scan
 - Each additional remote base adds 1ms per scan
 - Note: each “enabled” add 1ms per scan even if unused
- Actual scan time for the base depends on I/O installed
- Each RBC Communication Port transaction adds ~2 ms



Normal I/O

Remote I/O Optimization


- Use the minimum number of remote bases required for the application
- Disable all unused bases
- Minimize or eliminate the use of RBC serial ports



Normal I/O

Profibus I/O Operation

- Operates through a dual port RAM interface to a separate Profibus microprocessor

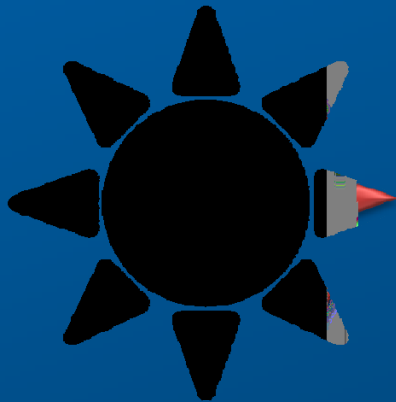

PLC SCAN

Dual Port
RAM



PROFIBUS SCAN



Normal I/O

Profibus I/O Optimization

- Important effects of separate Profibus scan
 - At the end of each Profibus cycle, the CPU receives an interrupt to get Profibus data
 - Transferring data from Dual-Port RAM to CPU memory requires 0.25-0.5 ms
 - Therefore, running a very fast Profibus cycle can degrade CPU performance.
 - For optimum performance, we recommend Profibus network operation at slowest baud rate that will achieve 2-3 cycles per PLC scan.
 - Profibus cycle speed is set in ComProfibus



Normal I/O

Profibus I/O Optimization

- Asynchronous Mode
 - PLC and Profibus scans run independently and fast as possible
- Synchronous Mode
 - Profibus is required to complete 2 scans during the normal I/O cycle
 - CPU will wait on Profibus scan before starting new RLL scan
- For best performance we recommend operation in asynchronous mode



Main RLL

Operation

- Runs once each scan from start until it encounters an END instruction.
- Most instructions execute $< 20\mu\text{s}$
- Some exceptions
 - TSET, DSET, and RSD
 - MOVE (can copy 32767 elements / scan)
 - Immediate I/O: Contacts, Coils, IORW
 - RLL PID (Fast Loop)
 - In-Line SF Programs and SF Subroutines



Main RLL

Optimization

- SKP (Skip) and LBL (Label)
 - Can be used to bypass sections of logic and improve scan time
 - Take care because Outputs are not updated and Timers do not run if “skipped”
- Use X, Y or C contacts and coils when possible. Avoid using “bit of word” contacts.
- Monitor Main RLL (Task 1) Peak Execution Time using TPET1 variable to see effects of optimizations



Special
Function I/O

Operation

- SF I/O transactions can be large (up to hundreds of bytes)
- Each SF module in the system can do up to 8 transactions per scan
- A high activity SF module (NIM or Ethernet) adds up to 40 ms per scan
- Moderate activity: ~15-20 ms per scan




Special
Function I/O

Optimization

- Move SF modules to Local Base when possible, especially communications modules with high activity.
- If it is not possible to put all SF modules in the Local Base, distribute SF modules evenly among Remote Bases.



2500 Series™ Processor Scan

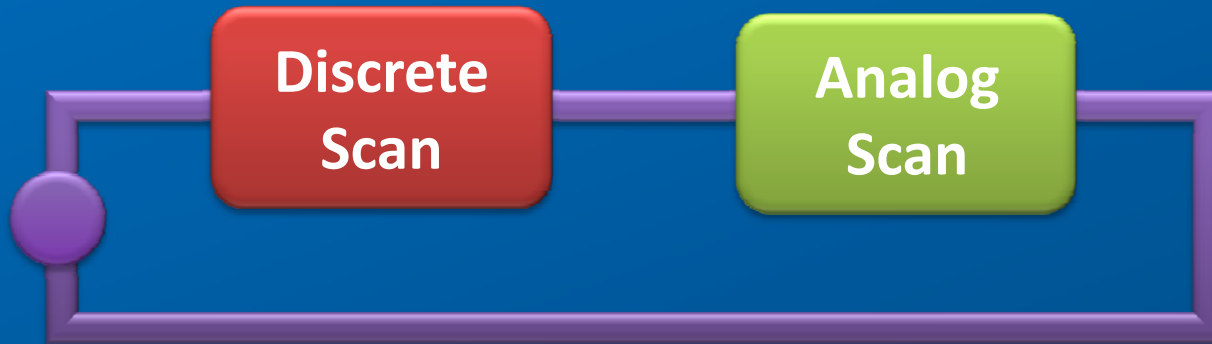

PID
Loops

Analog
Alarms

Cyclic SF

Priority
SF
Programs

Normal
SF
Programs

RLL
SFSUB

RLL
SFSUB0

Normal
Comm

Priority
Comm

Network
Comm

Diag-
nostics

Control Technology Inc.
Optimizing Process Performance Using the 2500 Series™ Processor



Analog
Scan

Analog Tasks Operation

- Each task is guaranteed execution once per scan
- Each task has a user-defined time slice which sets the maximum execution time for that task
- The task runs until all work is completed, or until the time slice expires
- Analog tasks are also executed during “wait time” that occurs in Normal I/O and SF I/O



2500 Series™ Processor Scan Analog Tasks

PID Loops

- PID loops set for cyclic operation, executed in order of priority. SF programs called by loops are also executed here.

Analog Alarms

- Alarms set for cyclic operation, executed in order of priority. SF Programs called by alarms are also executed here.



2500 Series™ Processor Scan Analog Tasks

Cyclic SF

- SF Programs set for cyclic operation, executed in order of priority

Priority SF Programs

- Priority SF Programs queued from RLL SFGPM box

Normal SF Programs

- Normal SF programs queued from RLL SFGPM box



2500 Series™ Processor Scan Analog Tasks

RLL
SFSUB

- SFSUBs queued from RLL SFSUB box

RLL
SFSUB0

- SFSUBs queued from RLL SFSUB0 box



2500 Series™ Processor Scan Analog Tasks

Normal Comm

- Commands from serial and USB ports which execute over several scans (ie SEARCH commands)

Priority Comm

- Commands from serial and USB ports which READ or WRITE data (0.5ms per command)

Network Comm

- Commands from CPU ethernet port (1-2ms per command)

Diag- nostics

- Memory test, program checksum, front panel, other hardware checks



Analog Tasks

Setting Time Slice

The screenshot shows a dialog box titled "PLC Scan Time" with a close button (X) in the top right corner. The dialog is divided into several sections for configuring scan parameters.

Scan Time

- Scan Time Mode: Variable (dropdown menu)
- Scan Time (ms): (empty text box)

Peak/Last Scan Times (ms)

Peak Scan Time:	8
Total Scan Time:	3
Peak Execution Time:	6
Discrete Scan Time:	4

Reset Peaks (button)

Time Slice (ms)

- Loop: 34
- Analog Alarm: 6
- Cyclic SF Program: 4
- Priority SF Program: 4
- Normal SF Program: 2
- Ladder SF Sub: 2
- Normal Communication: 2
- Priority Communication: 3
- Ladder SF Sub Zero (0): 2
- Network Communication: 5
- Report By Exception: (checkbox)

Accept (button) Cancel (button) Close (button)



Analog Tasks

Time Slice Optimization

- Programming Reference Guide Ch7
- Basic strategy
 - Reduce analog time slices as much as possible
 - Be sure loops and alarms don't overrun
 - Be sure SF program execution is satisfactory
- Use STW162 to detect overrunning loops, alarms, SF programs



Analog Tasks

Time Slice Optimization

- Use “PET” variables to view individual peak execution times
 - TPET1, TPET2: RLL execution times
 - APETn, LPETn: Loop / Alarm time from scheduling until execution completes
 - PPETn: SF Programs (queued from RLL) from scheduling until execution completes
 - SPETn: SF Subroutine (queued from RLL) from scheduling until execution completes




PLC Scan Mode Selection

- Variable
 - Fastest PLC Scan
 - Executes each Analog Task once / scan
- Variable with Limit
 - Repeats Analog Task processing (if needed) until Scan Time Limit is reached
- Fixed
 - Use only if fixed I/O update required



2500 Series™ Processor

High Priority Interrupts

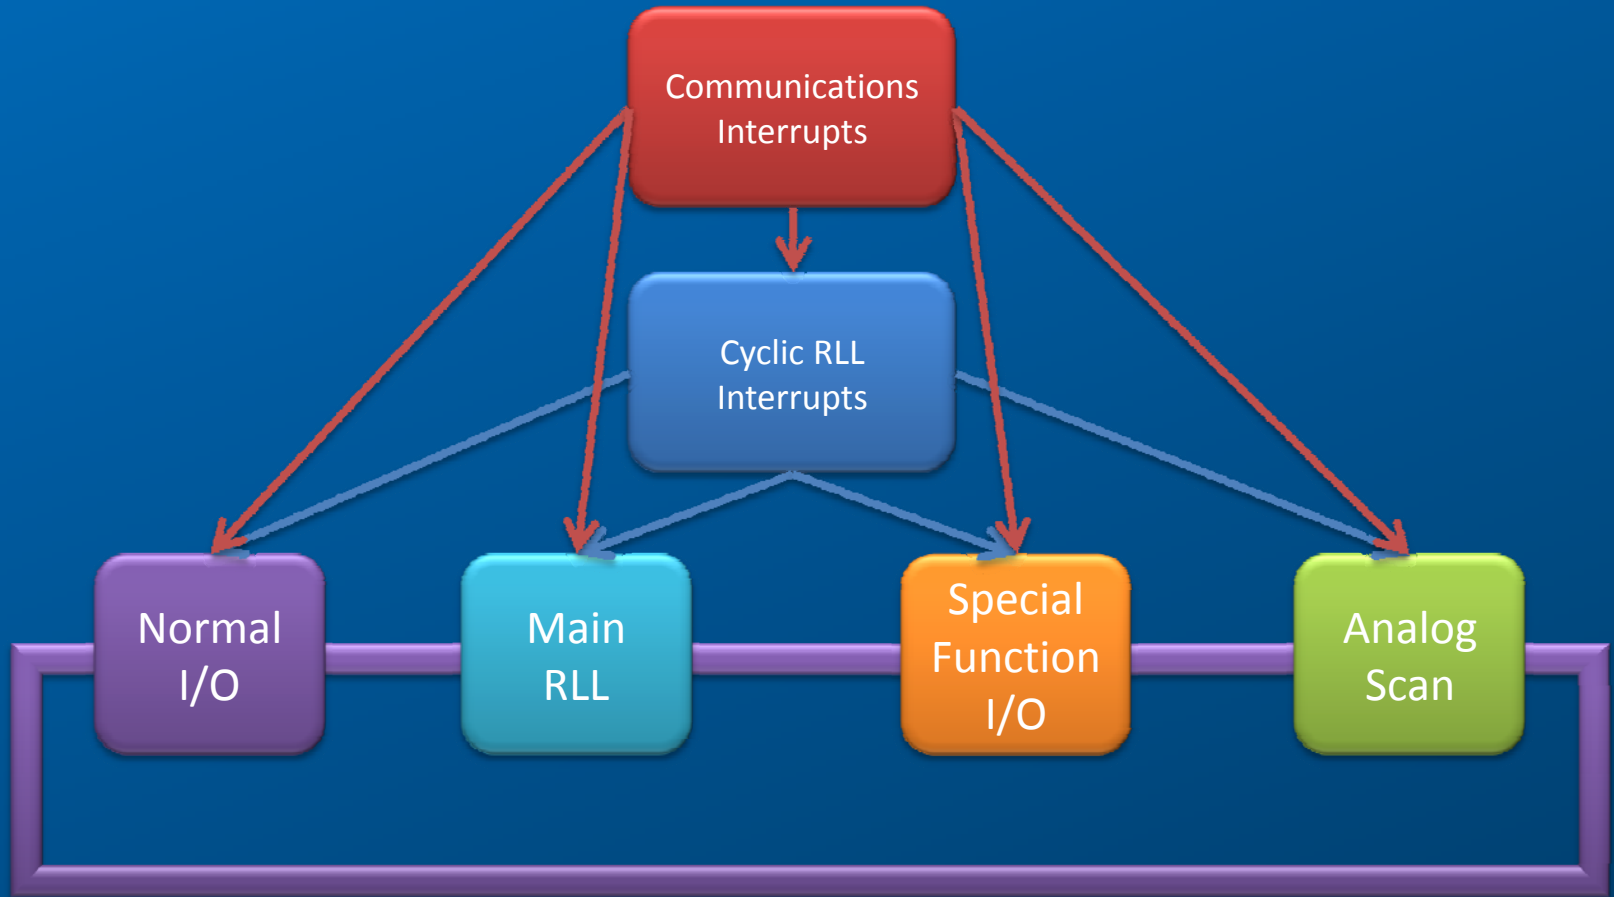

2500 Series™ Processor



High Priority Interrupts

- Cyclic RLL
 - Separate RLL program (TASK2) that runs periodically based on specified cycle time
 - Extends PLC Scan by the total time used to execute TASK2 logic during each scan.
 - Ideal for performing fixed time updates to critical I/O using Immediate I/O instructions.
 - It is also possible to “starve” processing time for other tasks if run too frequently.



Cyclic RLL

Effect on PLC Scan:

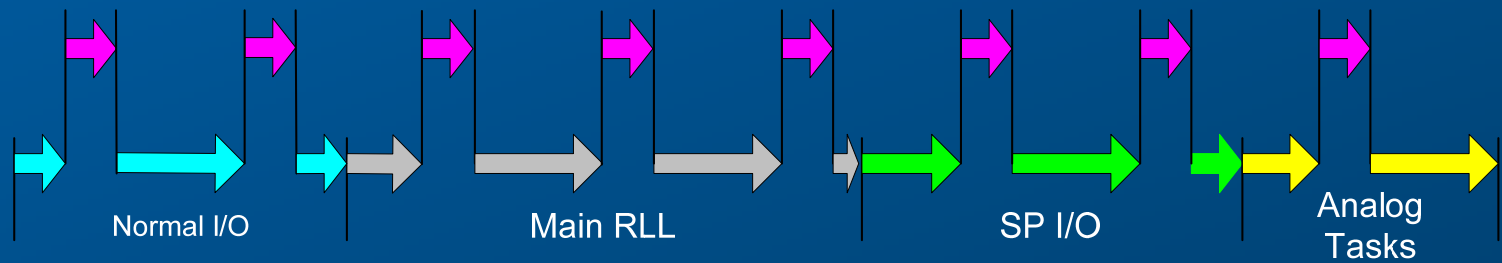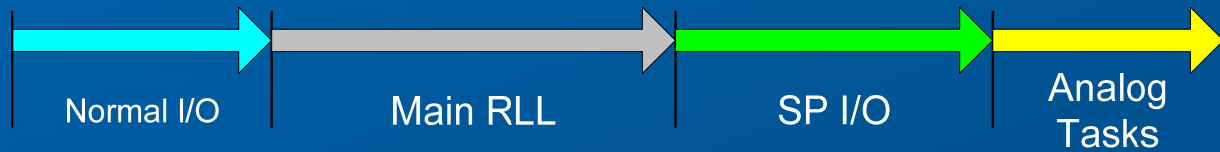

2500 Series™ Processor


High Priority Interrupts

- Communications Interrupts
 - Serial port (RS-232/USB) interrupts use minimal processing time (10-20 μ s)
 - TCP/IP message processing takes \sim 500 μ s to “run the stack” (validate and extract data).
 - Extends scan time if it occurs during Discrete Scan
 - Reduces time available for Analog Tasks if it occurs during Analog Scan



Communication Interrupts

Effect on Analog Tasks:

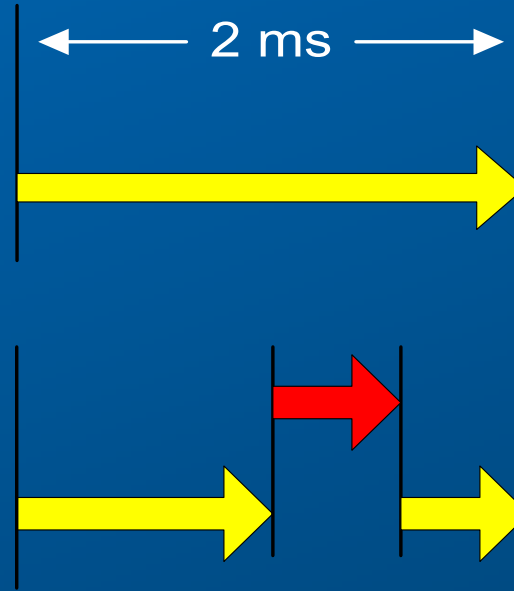

Other Optimization Guidelines

- Use “Variable” or “Variable with Limit” scan type.
- When fixed-interval I/O update is required, use Immediate I/O instructions in Cyclic RLL task.
- Avoid running Cyclic RLL task more frequently than required. Check execution time (TPET2).
- If using Ethernet connection:
 - Set ‘Network Comm’ time slice at 5ms minimum

